



StrongHandTools

**RHINO CART**  
MOBILE FIXTURING STATION

# 2020 METRIC CATALOG



Table + Fixture Kit

**ALL-IN-ONE**

Mobility & Storage

CHARGE RIGHT THROUGH YOUR  
MOST CHALLENGING PROJECTS!

The Rhino Cart® Mobile Fixturing Station is a turnkey system for fixturing and clamping in welding and fabrication. Clamp and fixture at any point on the reversible, flat ground, nitrided (heat treated) 1,200 x 750 mm tabletop for accuracy in all of your setups.

Be ready to handle any job with the Rhino Cart® package, including: the Rhino Cart® Welding Table + Fixture Kit.

(Kit content may differ from image.)

Nitrided **REVERSIBLE**  
Tabletop resists weld  
spatter and rust.

Quickly clamp and fixture at any  
point on the surface. Accurately  
setup stock for each new project.

**2x LIFE**


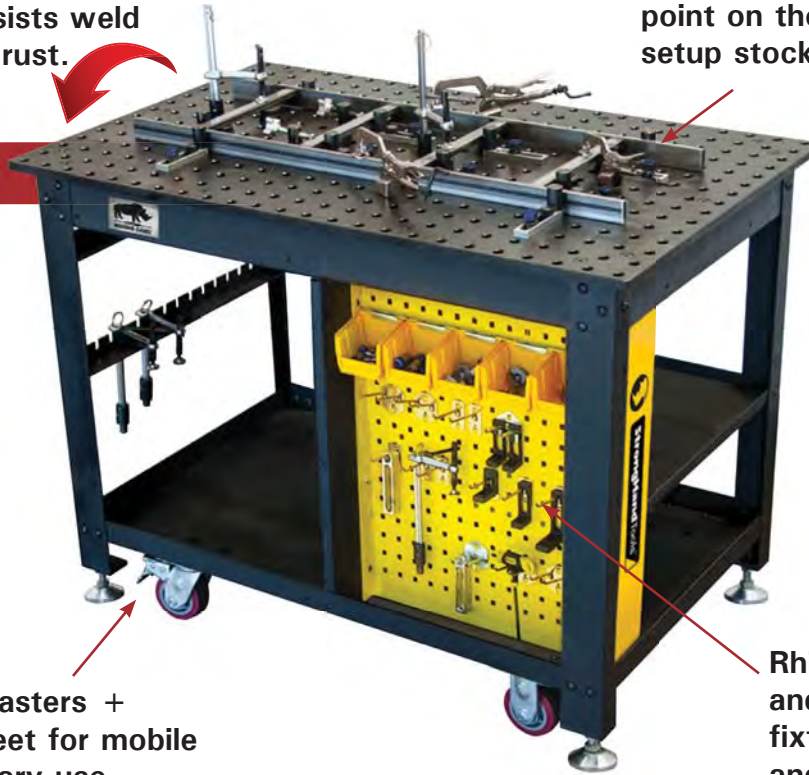


Table + Fixture Kit  
**ALL-IN-ONE**  
Mobility & Storage

Locking casters +  
leveling feet for mobile  
or stationary use.

Rhino shelves, racks,  
and pegboard keep your  
fixturing tools organized  
and within easy reach!

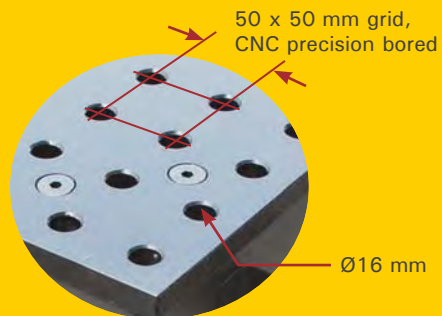

Accurately position parts in  
CNC precision bored 16 mm dia.  
holes in 50 x 50 mm spacing pattern.

Rhino Cart Part No.:

Tabletop Size:

Tabletop Thickness:

Tabletop Flatness:

Hole Diameter:

Grid Pattern:

Table Height:

Static Loading Capacity:

Tabletop Life:

**TDQ612075**

1,200 x 750 mm

16 mm

0.5 mm / 1,000 mm

16 mm

50 x 50 mm

910 mm

680 kg

Nitrided and black oxide table plate  
is **REVERSIBLE**. Weld spatter, rust  
and scratch resistant.

The Rhino Cart® Package Part No. TDQ612075-K1 includes the mobile welding table + 66 pc. fixturing kit TDK6100.



TDQ612075 x1

Welding Table, 1,200 x 750 mm, 910 mm height, 16 mm thickness, 16 mm dia. hole, 50 x 50 mm grid pattern, 680 kg static loading capacity, long life **REVERSIBLE** tabletop.

185 kg



UDN6150 x2

Inserta Clamp, T-Handle  
150 mm opening,  
83 mm reach,  
16 x 8 mm (D Rail)

0.6 kg



PT07K x2

Inserta Pliers,  
60 mm opening,  
50 mm reach

0.3 kg



PT09K x2

Inserta Pliers,  
100 mm opening,  
75 mm reach


0.4 kg



TCX6210 x2

Side Clamp,  
38 mm stroke


0.3 kg



T64217 x2

Magnetic V-Clamp Pad  
*\*PATENTED\**

0.02 kg



T60630 x8

**Stop / Extend**  
Aluminum D-Stop Bar,  
121.2 x 25 x 11.5 mm

0.04 kg



T60304 x2

**Stop / Support**  
Right Angle Bracket,  
41 x 91 x 30 mm

0.2 kg



T60305 x2

Right Angle Bracket,  
91 x 91 x 30 mm

0.3 kg



T64211 x4

**Locate / Support**  
V-Block Spacer,  
Ø38 x 11.5 mm

0.1 kg



T64216 x8

V-Block,  
Ø40 x 22.6 mm

0.02 kg



T50737 x12

**Spacer**  
Magnetic Rest Button,  
Ø40 x 11.5 mm H

0.1 kg



T65055 x10

**Locate / Lock**  
Ball Lock Bolt, Adjustable  
range: 22 ~ 27 mm,  
connecting tables to  
accessories, and  
accs. to accs.

0.07 kg



T64201 x2

Locating Pin goes into  
16 mm holes,  
33.5 mm H,  
no locking.

0.07 kg



T64203 x4

**Locate**  
Stop,  
Ø25 x 38 mm H

0.18 kg



T64205 x4

Stop,  
Ø25 x 50 mm H

0.22 kg